

Twin Deluxe Model No. 10363 Ceiling Exhaust Fan & Light.

PLEASE READ CAREFULLY

Read through these instructions completely before commencing installation.

Locate the Vent 'n' Lite in accordance with the requirements of the Australian/New Zealand Wiring Rules AS/NZS 3000:2000 relating to damp situations. In some installations this may mean that no part of the Vent 'n' Lite may be located directly above any part of a bath or shower recess or enclosure. For unenclosed showers refer to Wiring Rules conditions. It must not be installed where there is a possibility of water splashing on to the lamp.

NOTE : Vent 'n' Lite products must only be installed horizontally in ceiling.

Do not locate over cooking stove unless a 1.2 m (4 feet) minimum clearance can be achieved between cooking surface and lowest point on Vent 'n' Lite.

VENTILATION REQUIREMENTS



For maximum efficiency and fan performance there are a few key points to keep in mind when installing your Vent 'n' Lite.

- Sufficient air inlet into room: Steam and odours will only be removed if there is sufficient flow of air through the room. Ensure generous inlets exist through windows, vents or under the door. Air flow path from inlet to fan should ideally pass over the steam or odour sources.
 - Adequate ventilation in roof cavity: It is essential that there is adequate space within the roof cavity so that exhaust air from the Vent 'n' Lite can dissipate. Where space is restricted, use Fig.3 as a guide to minimum requirements for adequate ventilation.
- The roof cavity itself should be well ventilated to outside so that moist air can be removed. Local building codes may require flueing to outside through roof or as per Fig. 3 for flat roof installation.
- Where ventilation space is restricted: This product is not recommended for installation between floors of multi-storey dwellings, or where space within the roof cavity is severely restricted and a flue as per Fig.3 cannot be fitted. IXL has other Tastic products available that are particularly suited to installations between floors or where space is restricted. Contact your nearest IXL Service Centre on the numbers over the page for further details.

CLEARANCES AROUND THE Vent 'n' Lite

This appliance must be mounted so that the lowest point is at least 2.1m above the floor. A minimum clearance of 75 mm (3") is required above the top of the Vent 'n' Lite when installed in a well ventilated roof cavity (see Fig.1). Where ventilation around the Vent 'n' Lite is restricted, this clearance should be increased to a minimum of 100 mm (4").

The Vent 'n' Lite may be installed between joists using the inbuilt clip fasteners. Alternatively, the unit can be installed near a joist using 2 screws through the flange (Fig. 2). Do not allow insulation material to rest against the sides or top of the Vent 'n' Lite unit when installed.

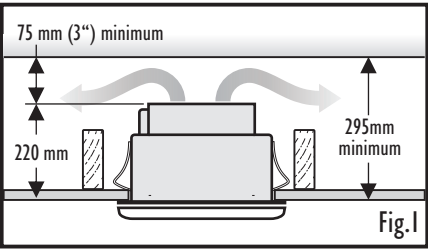


FLAT ROOF INSTALLATIONS WITH INSUFFICIENT CLEARANCE.

When installing into a flat roof with insufficient clearance, or where ceiling cavity ventilation is restricted, an external flue must be installed. Use Fig. 3 as a guide to minimum external outlet requirements.

IMPORTANT :

Do not attach the flue to the body of the Vent 'n' Lite. Allow for 10-20mm minimum gap between the Vent 'n' Lite and the end of the duct.




ELECTRICAL REQUIREMENTS.

Refer to table in Fig. 4 for supply requirements. Vent 'n' Lite may be connected to a lighting or power circuit if loading permits. This model is for wired-in installation and wiring must be carried out by a registered electrician. Do not use this product with any solid state speed control.

See Fig 4 for wiring configurations and options .



For information on switch location within the bathroom, refer to Wiring Rules AS/NZS 3000:2000 Section 7.1.4.

An isolating switch must be installed as per AS/NZS 3000.

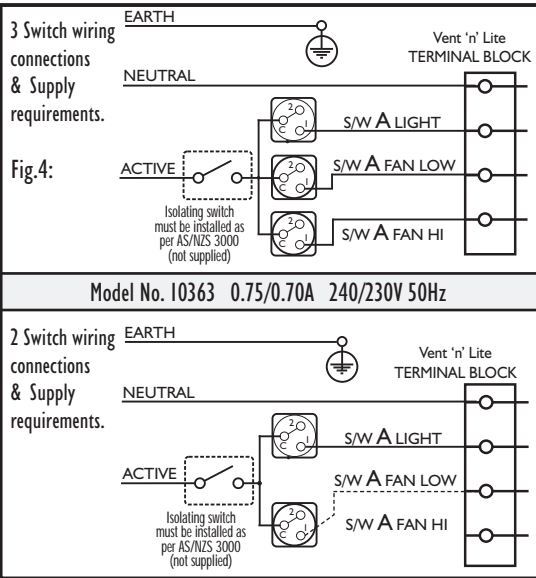

INSTALLATION INSTRUCTIONS

- (1) After determining the location of the Vent 'n' Lite, use this template to mark out and cut 262 mm x 262 mm aperture in the ceiling (fig.5). For the execution of this step it is highly recommended that appropriate safety gear is worn.
- (2) Spin the fan to check it rotates freely, remove the fascia, and packing materials from the Vent 'n' Lite body.
- (3) Unscrew terminal cover and make necessary wiring connections. Refit terminal cover and push Vent 'n' Lite body into aperture, ensuring supply cables do not rest over top of Vent 'n' Lite.
- (4) To secure Vent 'n' Lite, push lower ends of the two spring clips apart (fig.6). Ceiling board should be adjusted to enable springs to be fitted without excessive force.
- (5) Ensure globes are screwed in well for good electrical contact, then snap fit front fascia into position.
- (6) Wipe fascia clean. Connect power and check all functions.





Vent ‘n’ Lite

Operation & Care Instructions

GETTING THE MOST FROM YOUR Vent ‘n’ Lite

The IXL Vent ‘n’ Lite range has been designed to exacting standards to give you many years of trouble-free operation. To ensure you get the most from your Vent ‘n’ Lite there are a few simple points to keep in mind.

VENTILATION To ensure optimum performance of the exhaust fan, it is essential that there is adequate air flow into the room exist through windows, vents or under the door. Air flow path from inlet to fan should ideally pass over the steam or odour source. Please note that the Vent n Lite can be used with either one or two fan speed settings. If two fan speed settings are required please ask your electrician to supply a three gang wall switch, otherwise a two gang wall switch will suffice if only one fan setting is required.

CENTRE LIGHTS The two 60 watt lights in all Vent ‘n’ Lite models is designed to provide general illumination in the bathroom, ensuite, kitchen, laundry, toilet, workshop. For specific tasks like shaving or putting make-up on, you may need extra lighting to suit your individual needs, lighter coloured walls and decor also help brighten any room by reflecting more light.

REPLACEMENT LAMPS

Fascia must be removed prior to replacing globe.

Ensure globes are screwed well in after replacement to give good electrical contact.

Replace with I22I2 Crompton R63 ES halogen globes 42W (60W equivalent).

Light globes are not covered by manufacturer’s warranty.

Note: 60 watt maximum light globe is recommended, replacement with any other may cause damage to the moulding and void the warranty.

SAFETY PRECAUTIONS

- Make sure the globes have cooled and power is off to the Vent ‘n’ Lite before removing lamps for replacement.
- Do not operate this appliance without the plastic fascia in position.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
Young children should be supervised to ensure they do not play with the appliance.
- This appliance must be mounted with the lowest point at least 2.1 metres from the floor.

CLEANING - WARNING: Allow globe to cool before cleaning. To clean globes and fascia use a cloth dampened with mild detergent or liquid glass cleaner.

SERVICE

For comments, questions or warranty matters:

Sampford IXL Pty Ltd
Service Department
I/39I Boundary Road
Truganina Victoria 3029 Australia
Phone: I300 727 42I
Fax: I300 727 425
service@ixl.com.au
info@ixl.com.au
www.sampfordixl.com.au

OWNERS WARRANTY AND SERVICE RECORD.

Complete and keep the following information as it is vital for warranty claims and service calls. Ensure you maintain proof of purchase including date.

DO NOT SEND THIS CARD TO IXL.

Cat./Model Number
Serial NumberDate purchased...../...../.....
Installed by

WARRANTY

This Warranty against defects for your newly purchased IXL Vent 'n' Lite product is proudly prepared by Sampford IXL Pty Ltd of I/39I Boundary Road, Truganina, VIC 3029, phone I300 727 42I.

I. Sampford IXL Ventilation products come with guarantees that do not exclude the following consumer entitlements under the Australian Consumer Law:

a. replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage; and
b. to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

2. Sampford IXL warrants that your product and related supply will be free from defects in materials and workmanship during the warranty term. Your warranty term is three years commencing from the date of purchase. Sampford IXL acknowledges this product requires professional installation and product removal is hazardous to consumers, accordingly any necessary inspections and services will be carried out on site. You should not attempt de-installation.

3. Subject to Point I, Sampford IXL will repair any defects in materials and workmanship during the warranty term and if the product is deemed irreparable provide a replacement of an equivalent current model where the balance of the warranty period from the original date of purchase will take effect.

4. To the fullest extent permitted by law and subject always to Point I, Sampford IXL will not be liable for:

a. any loss or damage arising from loss of use, loss of profits or revenue; or
b. for any indirect or consequential loss or damage resulting from any breach of this warranty against defects.

5. Defective Sampford IXL Tastic products may be repaired using refurbished parts or if required, completely replaced by a refurbished product of the same type. Limitations to Your IXL warranty

6. Subject to Point I, this Warranty:

a. will only be provided to the original purchaser where the original purchase was made from a Sampford IXL Authorised Dealer or Reseller and proof of such purchase can be presented at the time of service;
b. only applies to Sampford IXL products purchased in Australia from a Sampford IXL Authorised Dealer or Reseller and installed by a qualified person where a Certificate of Compliance in accordance with State/Territory laws is provided;
c. will not apply where the defect in or failure of the product is attributable to misuse, abuse, accident or non-observation of the manufacturer's instructions. This product must be used in accordance with the manufacturer's instructions;
d. will not cover faults due to normal wear and tear with reasonable use nor consumable components such as globes, filters, glass items, etc;
e. will not cover any damages or problems caused to this product by natural forces eg. storm, fire, flood, and earthquake; or by intrusion or accumulation (or both) of foreign matters eg. dust, soil, and moisture. Sampford IXL recommends that you take out appropriate insurances to protect your product to this end;
f. will not apply if this product is installed in a mobile dwelling eg. caravan or boat;
g. will not apply if this product is removed from the location where it was first installed;
h. is immediately void if the serial or model number label is removed or defaced;
i. is immediately void if the product is serviced or repaired by an unauthorised/unqualified personnel;
j. covers use of this product for domestic use only;
k. will not be restarted or extended upon repair or replacement of the product or a part.

How to make a Claim under Your IXL Warranty

7. To make a claim under this Warranty you will need to:

a. contact Sampford IXL service department on I300 727 42I or service@ixl.com.au to provide details and register your claim enabling a Sampford IXL assessment;
b. submit proof of purchase with your claim eg. tax invoice or purchase receipt;
c. where a property has been constructed by a builder/developer and it is fitted with IXL products, please submit proof of purchase by way of the certificate of occupancy, with your claim.

8. Sampford IXL will contact you to make arrangements for service on site.

9. Subject to Point I, you will be responsible for any costs relating to the provision of your product to a Sampford IXL Authorised Service Dealer.

10. Subject to Point I, in the event you live more than 50 km from a Sampford IXL Authorised Service Dealer you may be subject to travel or transport costs to facilitate the repairing or replacement of your IXL product.

11. Sampford IXL and its Authorised Service Dealers reserve the right to seek reimbursement of any costs incurred by them should your IXL product be found to be in good working order.

Privacy

The privacy of your personal information has always been important to us. To learn more about how we collect, keep and use your personal information, please obtain a copy of our privacy statement by visiting our website at www.sampfordixl.com.au or by contacting us via email on info@ixl.com.au or by telephone on I300 727 42I.

© Sampford IXL, 2015

Retain this card for operating instructions, warranty and service details.

TEMPLATE NOTE: Outside dimensions of card are 262 mm x 262 mm..

TEMPLATE NOTE: Outside dimensions of card are 262 mm x 262 mm..